




Lubricant & Additives for the Drilling Industry

Asbury has developed a series of products for the drilling industry to be used as lubricant additives. These products act as mechanical lubricants, or as film forming / barrier lubricants. Our products decrease the coefficient of friction, reducing torque and drag, and the potential for differential sticking in the well bore. These products are particularly effective for drilling applications such as deviated wells and those with directional concerns.


Mechanical Lubricants

Grade	Type	Size
CB Fine	Carbon	20 x 325 mesh
CB Medium	Carbon	20 x 200 mesh
CB Coarse	Carbon	1/4 x 30 mesh
CB-2	Blend	20 x 325 mesh

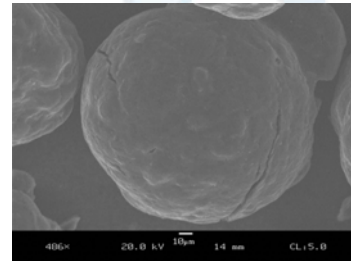

Barrier Lubricants

Grade	Type	Size
3609	Graphite	-100 mesh
928	Graphite	-325 mesh
076-OF	Graphite	-200 mesh
GK 645	Suspension	5 µ average

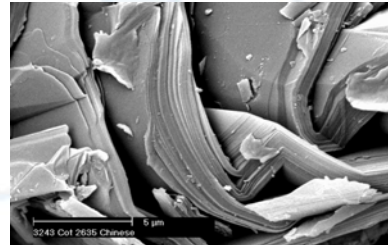

Advantages

- Reduces friction
- Decreases torque and drag
- Oil and water based compatible
- Temperature stable
- Non abrasive
- Environmentally acceptable

**In our Bag or yours –
Use Asbury for all your Lubricant and Additive needs.**



SOUTHWESTERN GRAPHITE
PO Box 876 • Highway 12 • DeQuincy, LA 70633
Phone: 337.786.5905 • Fax: 337.786.5907 • email: southwesterninfo@asbury.com

www.asbury.com